




DYNEEMA® D12 SK78

12 strand plaited

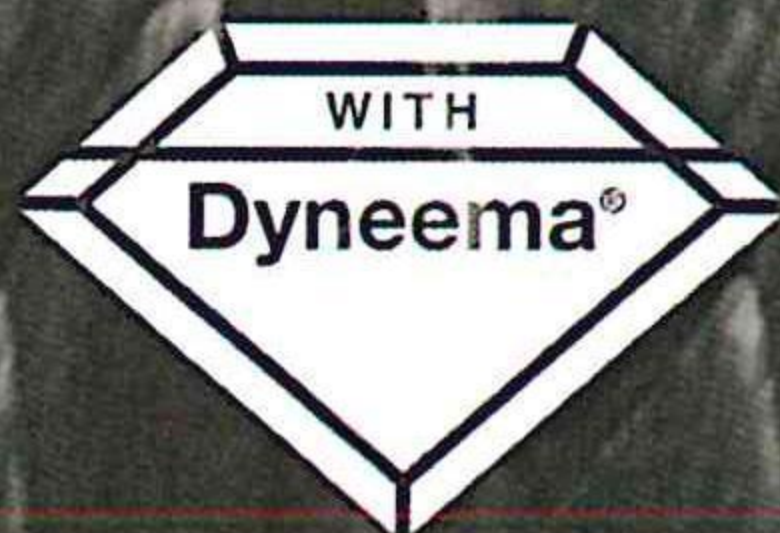


Diam [mm]	Circumf. [inch]	Weight [kg/100m]	Av. Breakload [t]
4	0.50	0.9	1.4
5	0.63	1.5	2.2
6	0.75	2.0	3.2
7	0.88	2.7	4.6
8	1.00	3.6	5.8
9	1.13	4.7	7.3
10	1.25	5.7	9.1
12	1.50	8	13
14	1.75	11	17
16	2.00	14	22
18	2.25	18	28
20	2.50	22	34
22	2.75	26	42
24	3.00	31	48
26	3.25	36	58
28	3.50	42	68
30	3.75	48	78
32	4.00	55	89
34	4.25	62	100
36	4.50	69	111
38	4.75	77	123
40	5.00	86	136
42	5.25	94	148
44	5.50	104	168
46	5.75	113	182
48	6.00	123	195
50	6.25	138	203
52	6.50	150	215
54	6.75	164	226

SK78

Reduced creep characteristics

spec. gravity: 0.97
melting point: 150 °C
max. elongation: 4 %

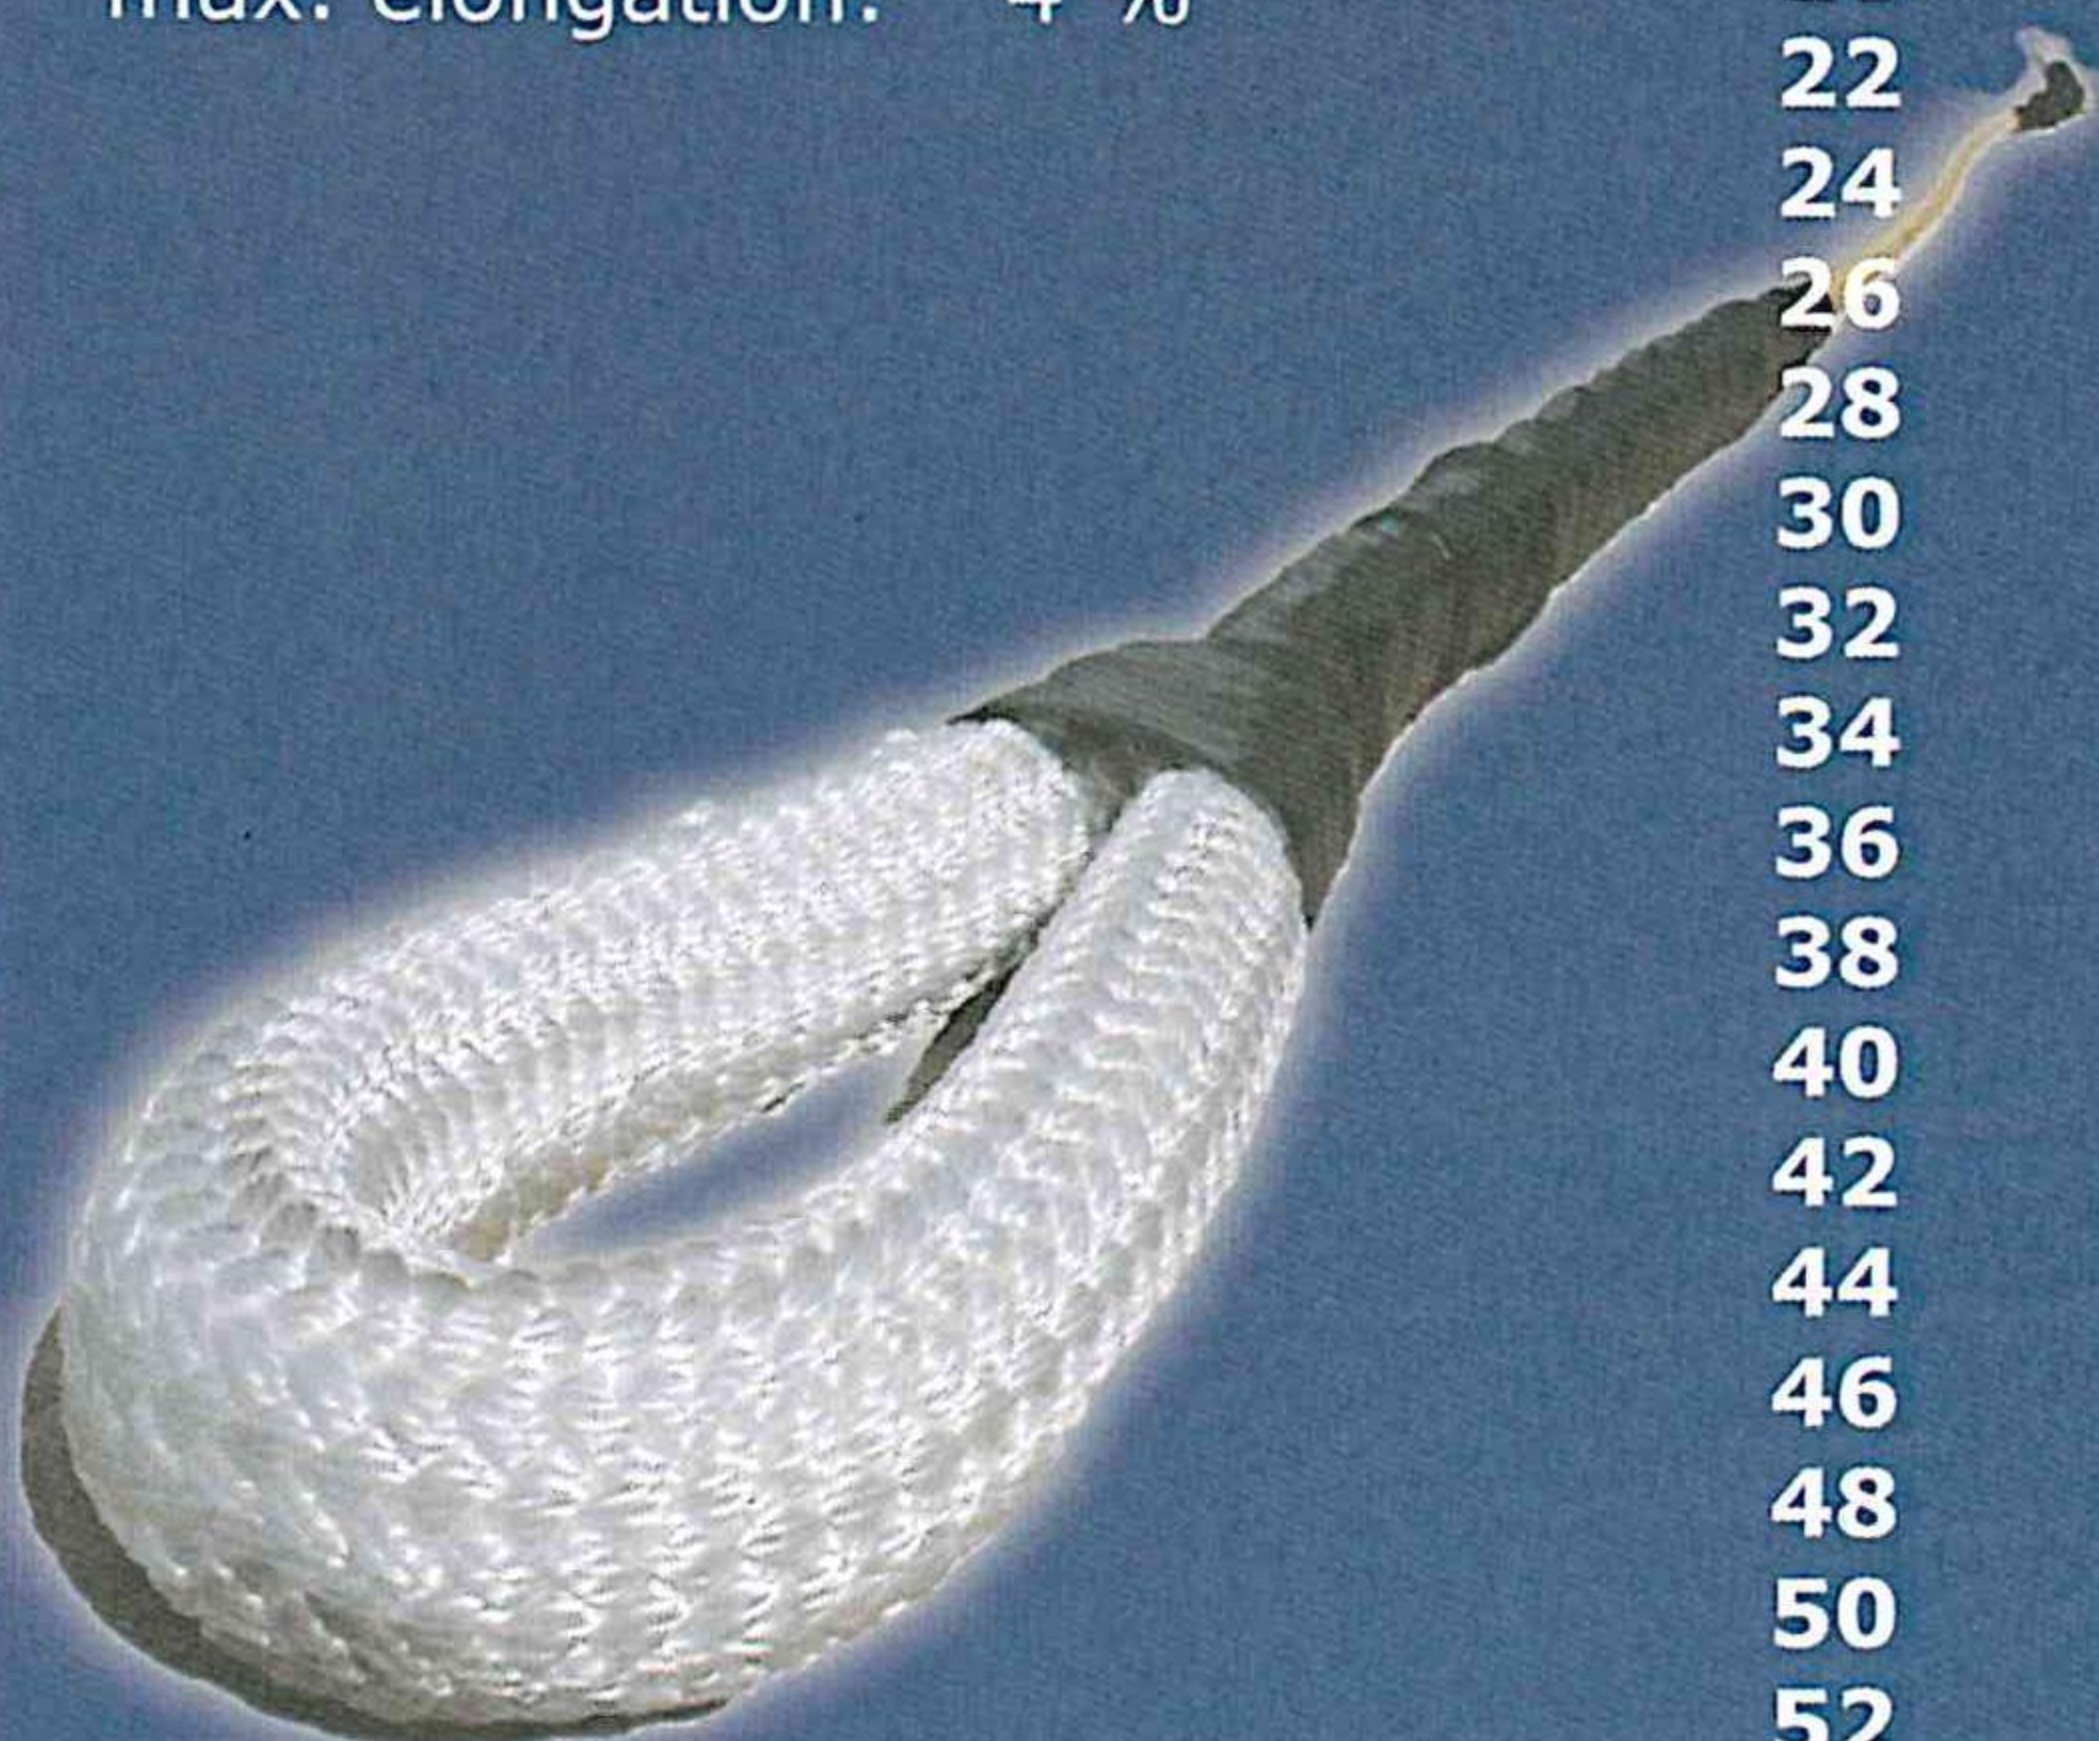

Dyneema® D-Rope is available in SK62 SK75 (XBO) SK78 (XBO) SK90, HS and DUPLEX. All D-Rope can be supplied with